


CL CABINETS

DISTINCT SEGREGATION/ACCESS CONTROL TO EACH CABINET BAY

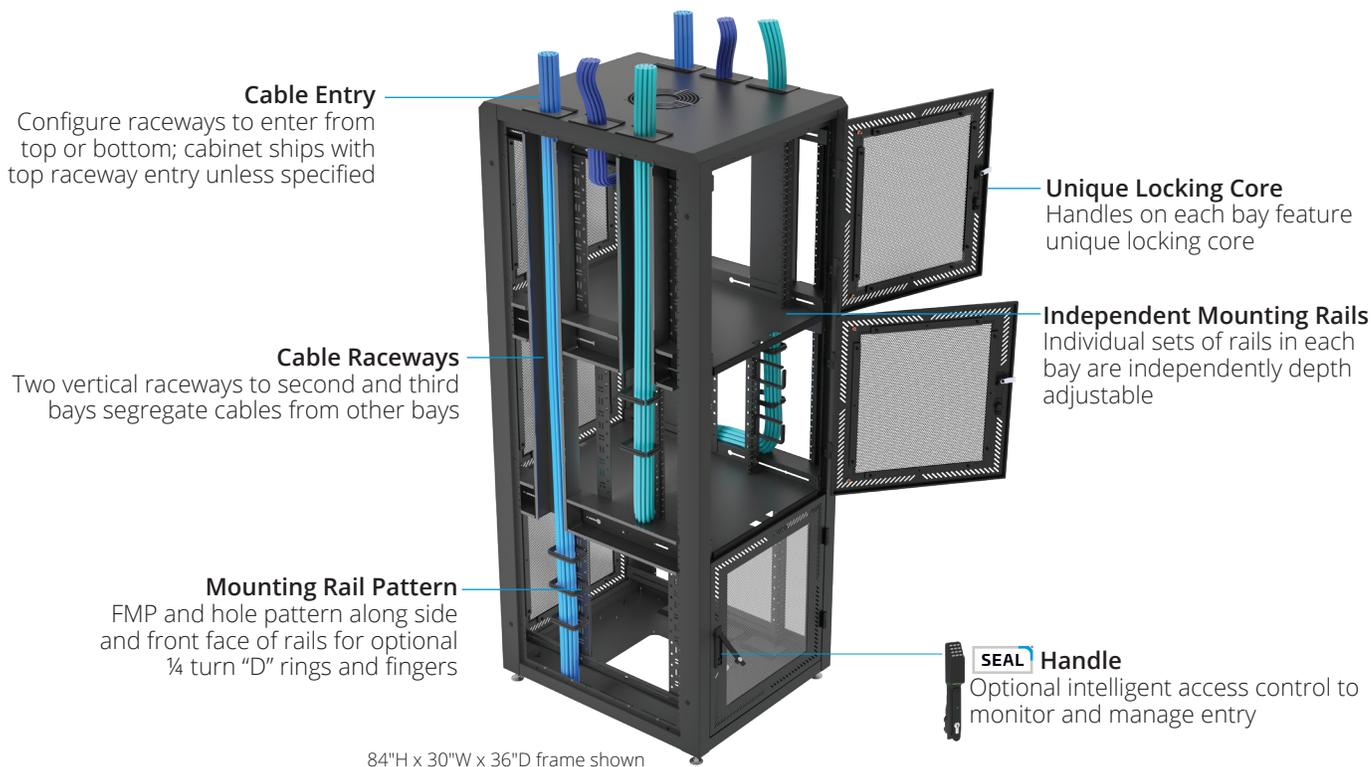


| Height | Width | Depth | Doors | Example |
|-----------|-------|-------|---------------------------|-----------------------|
| GL840CL | 30 | XX- | XX | Configured CL cabinet |
| 840 (84") | 30 | 36 | MM (mesh front/rear) | GL840CL-3036-2MM |
| | | 42 | PF (plexi front/fan rear) | |
| | | 48 | | |

FEATURES




- Welded frame (including top and bottom) with 19" EIA mounting rails with RMU markings, FMP, and square hole pattern to use with optional ¼ turn "D" rings
- Two pairs of 3/8" sq. (M6) rails in every bay
- Pair of solid tamper resistant side panels (internally secured)
- Adjustable levelers, 2.5"H
- Dedicated cable entry to each bay; entry is from cabinet top unless specified
- Front and rear doors with locking swing handle; unique locking core to each bay
- 2500 lb. weight capacity
- Color: Black
- Standards: RoHS II

2 BAY COLO

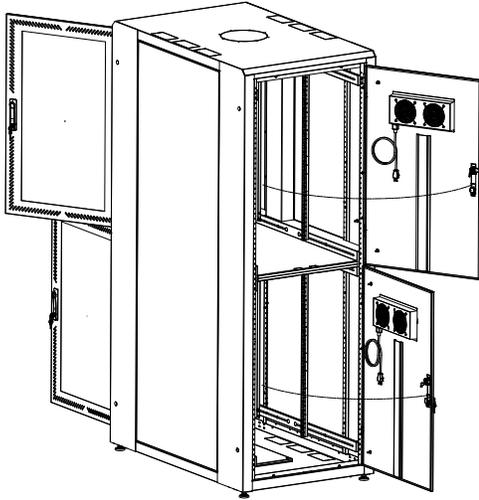


CABINET DEPTHS

| Part Number | Depth |
|---------------|-------|
| GL843036CL2PF | 36" |
| GL843042CL2PF | 42" |
| GL843048CL2PF | 48" |

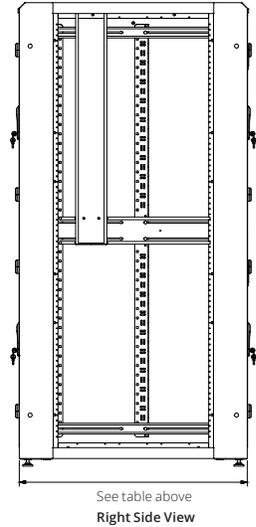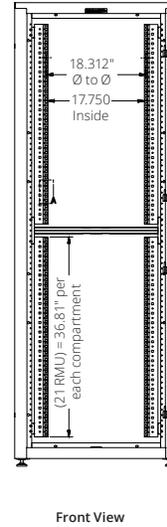

3 BAY COLO

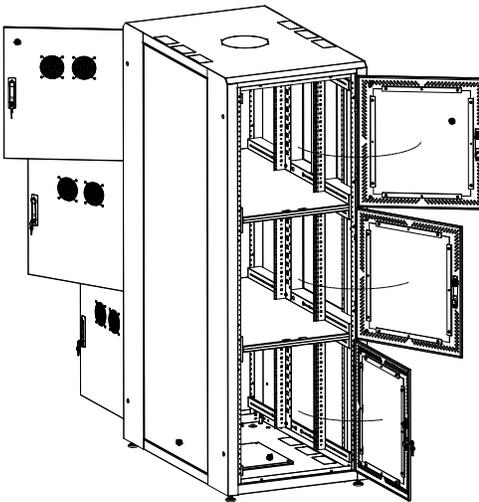

CABINET DEPTHS

| Part Number | Depth |
|---------------|-------|
| GL843036CL3PF | 36" |
| GL843042CL3PF | 42" |
| GL843048CL3PF | 48" |

