



F117 Single Console

1080p
Full HD

FC CE RoHS REACH

Drawer Features & Display Benefits

- ▶ 1U 17" widescreen LCD console drawer with VGA and DVI-D
- ▶ Support **Full HD** with 1080p resolution
- ▶ Green LED-backlit panel technology
- ▶ 104-key keyboard with either touchpad or trackball
- ▶ MAC or SUN Micro keyboard options available
- ▶ New enhanced aesthetics with molded front handle
- ▶ Short depth design of 460mm (18.1") only
- ▶ Front USB port for device access (USB Hub KVM only)

Options

- 3G / HD / SD-SDI Broadcast-grade input (w/ speaker)
- HDMI (w/ speaker)
- 2-post rack mounting brackets (**ORB-2.1**)
- DC power : 12V / 24V / 48V / 125V / 250V

Specifications

• LCD Panel

Size (diagonal) :	17.3" widescreen TFT
Max resolution :	1920 x 1080
Brightness (cd/m2) :	400
Backlight :	LED
Colors :	16.7 M, 8-bit
Contrast ratio (typ) :	600 : 1
Viewing angle (H/V) :	160° x 140°
Active area (mm) :	382 x 215
MTBF (hrs) :	50,000
Video input :	VGA or DVI-D

• Speaker :

Built-in Dual Stereo Speakers
(HDMI only) 2W x 2

• Casing Color :

Black (RAL 9005)

• Power Input :

Auto-sensing 100 to 240VAC,
50 / 60Hz

• Power Consumption (single console)

Sreen on :	Max. 25W
Power saving mode :	Max. 4W
Power button on :	Max. 1W

• Environmental

Operating temperature :	0 to 55°C degree
Storage temperature :	-20 to 60°C degree
Operating humidity :	20~90%, non-condensing
Storage humidity :	5 ~90%, non-condensing
Operating altitude :	16,000 ft
Non-operating altitude :	40,000 ft
Shock :	10G acceleration (11ms duration)
Vibration :	5~500Hz 1G RMS random vibration

• Regulatory

Safety :	FCC & CE certified
Environmental :	RoHS2 & REACH compliant

• Weight (single console)

Net :	10.8 kgs / 24 lbs
Gross :	15.8 kgs / 34.8 lbs

• Dimensions (single console)

Product :	441.6 x 460 x 44 mm / 17.4 x 18.1 x 1.73 inch
Packing :	590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch

Console Cable

CX-6

- 6 feet DVI-D console cable (bundle)
- DVI-D + USB, server end
- DVI-D + DB15 (USB KB & MS), console port



or

CB-6


- 6 feet VGA console cable (alternative)
- VGA + USB, server end
- DB15 (VGA, USB KB & MS), console port

Standard Keyboard

Ge G keyboard integrated with touchpad

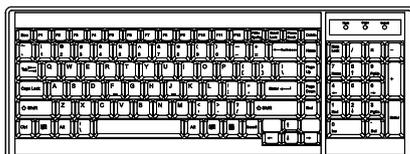

Gb G keyboard integrated with trackball

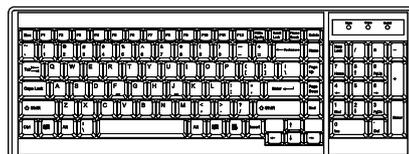

Supporting layouts

America		United States			
EMEA					
	United Kingdom	Germany	France	Spain	Norway
	Italy	Russia	Switzerland	Netherlands	Portugal
Asia					
	China	Japan	Korea	Arabia	Turkey

Keyboard Options

* US layout only

Me Mac keyboard with touchpad



Se S keyboard with touchpad

Mb Mac keyboard with trackball

Sb S keyboard with trackball



1U 17" FHD LCD KVM Drawer



• Dimensions (with KVM)

Product : 441.6 x 580 x 44 mm / 17.4 x 22.8 x 1.73 inch

Packing : 590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch

• Weight

Net : 11.6 kgs / 25.5 lbs

Gross : 17.5 kgs / 38.5 lbs

• Power Consumption with KVM integration :

Screen on : Max. 55W

Power saving mode : Max. 34W

• Casing Color : Black (RAL 9005)

* For details, please refer to our KVM rear kit user manuals.

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MUKVM-KIT.pdf

Matrix Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	-	F117 - MUIP1613	F117 - MUIP3213
	1	1	2	-	F117 - MUIP1624	F117 - MUIP3224
	1	1	0	-	F117 - MU1602	F117 - MU3202
	1	2	0	-	F117 - MU1603	F117 - MU3203
	1	3	0	-	F117 - MU1604	F117 - MU3204

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-UKVM-KIT.pdf

Combo Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	F117 - UIP802	F117 - UIP1602	F117 - UIP3202
	1	1	0	F117 - U802	F117 - U1602	F117 - U3202
1	0	0	F117 - U801	F117 - U1601	F117 - U3201	

Cat6 KVM Dongle : DG-100S (VGA-USB) / DG-100 (VGA-PS/2) / DG-100SD (DVI-USB)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf

Matrix DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	F117 - MIP813	F117 - MIP1613	-
	1	1	2	F117 - MIP824	F117 - MIP1624	-
	1	1	0	F117 - M802	F117 - M1602	-
	1	2	0	F117 - M803	F117 - M1603	-
1	3	0	F117 - M804	F117 - M1604	-	

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf

Combo DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	F117 - IP802	F117 - IP1602	-
	1	1	0	F117 - 802	F117 - 1602	-
1	0	0	F117 - S801	F117 - S1601	-	

Combo DB-15 KVM Cable : CE-6 / 10 / 15 (6, 10 or 15 ft)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM-KIT.pdf

DVI-D KVM	Local	Remote	IP	12-port	-	-
	1	0	0	F117 - 1201D	-	-

DVI-D KVM Cable : CI-6 / 15 (6 or 15 ft)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-USBKVM-KIT.pdf

USB Hub DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	F117 - IP802H	F117 - IP1602H	-
	1	1	0	F117 - 802H	F117 - 1602H	-
1	0	0	F117 - 801H	F117 - 1601H	-	

USB KVM Cable : CB-6 / 10 / 15 (6, 10 or 15 ft)