



S117 / 119 Single Console



Drawer Features & Display Benefits

- ▶ 1U 17" or 19" LCD console drawer
- ▶ Direct Support for SUN Micro 1152 x 900 native resolution
- ▶ Secure remote user access across the world wide web
- ▶ Green LED-backlit panel technology
- ▶ 104-key keyboard with SUN hotkeys
- ▶ Short depth design of 460mm and 500mm respectively
- ▶ New enhanced aesthetics with molded front handle
- ▶ Front USB port for device access (USB Hub KVM only)

Options

- 2-post rack mounting brackets (**ORB-2.1**)
- DC power : 12V / 24V / 48V / 125V / 250V

Specifications

• LCD Panel

| Manufacturer : | AUO | AUO |
|------------------------|--------------|--------------|
| Size (diagonal) : | 17" TFT | 19" TFT |
| Direct resolution : | 1152 x 900 | 1152 x 900 |
| Native resolution : | 1280 x 1024 | 1280 x 1024 |
| Brightness (cd/m2) : | 250 | 250 |
| Backlight : | LED | LED |
| Colors : | 16.7 M | 16.7 M |
| Contrast ratio (typ) : | 1000 : 1 | 1000 : 1 |
| Viewing angle (H/V) : | 170° x 160° | 170° x 160° |
| Active area (mm) : | 338 x 270 | 376 x 301 |
| MTBF (hrs) : | 30,000 | 30,000 |
| Video input : | VGA or DVI-D | VGA or DVI-D |

• **Power Input :** Auto-sensing 100 to 240VAC, 50 / 60Hz

• Power Consumption (single console)

| | |
|---------------------|----------|
| Screen on : | Max. 25W |
| Power saving mode : | Max. 4W |
| Power button on : | Max. 1W |

• Environmental

| | |
|--------------------------|------------------------------------|
| Operating temperature : | 0 to 55°C degree |
| Storage temperature : | -20 to 60°C degree |
| Operating humidity : | 20~90%, non-condensing |
| Storage humidity : | 5 ~90%, non-condensing |
| Operating altitude : | 16,000 ft |
| Non-operating altitude : | 40,000 ft |
| Shock : | 10G acceleration (11ms duration) |
| Vibration : | 5~500Hz 1G RMS random vibration |

• Casing Color :

Black (RAL 9005)

• Regulatory

| | |
|-----------------|-------------------------|
| Safety : | cUL, FCC & CE certified |
| Environmental : | RoHS2 & REACH compliant |

• Weight (single console)

| | Net | Gross |
|--------|---------------------|---------------------|
| S117 : | 12 kgs / 26 lbs | 16.6 kgs / 36.5 lbs |
| S119 : | 12.7 kgs / 27.9 lbs | 17.3 kgs / 38.1 lbs |

• Product Dimensions (single console)

| | |
|--------|---|
| S117 : | 441.6 x 460 x 44 mm / 17.4 x 18.1 x 1.73 inch |
| S119 : | 441.6 x 500 x 44 mm / 17.4 x 19.7 x 1.73 inch |

• Packing Dimensions (single console)

| | |
|--------------|---|
| S117 / 119 : | 590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch |
|--------------|---|

Console Cable

CX-6

- 6 feet DVI-D console cable (bundle)
- DVI-D + USB, server end
- DVI-D + DB15 (USB KB & MS), console port



or

CB-6


- 6 feet VGA console cable (alternative)
- VGA + USB, server end
- DB15 (VGA, USB KB & MS), console port

Keyboard

Se S keyboard integrated with touchpad

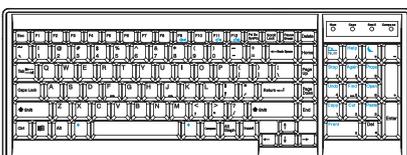

Sb S keyboard integrated with trackball

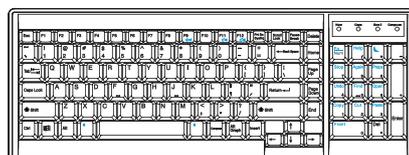

Supporting layouts

America 
United States



KVM

- Product Dimensions (with KVM)**
 S117 : 441.6 x 580 x 44 mm / 17.4 x 22.8 x 1.73 inch
 S119 : 441.6 x 620 x 44 mm / 17.4 x 24.4 x 1.73 inch
- Packing Dimensions (with KVM)**
 S117 : 590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch
 S119 : 590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch
- Power Consumption with KVM integration :** * For details, please refer to our KVM rear kit user manuals.
 Sreen on : Max. 55W
 Power saving mode : Max. 34W
- Weight (Net / Gross)**
 S117 : 13 kgs (28.6 lbs) / 19 kgs (41.8 lbs)
 S119 : 13.7 kgs (30.1 lbs) / 19.7 kgs (43.3 lbs)
- Casing Color :** Black (RAL 9005)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MUKVM-KIT.pdf

X stands for 17" or 19" LCD size.

| Matrix Cat6 KVM | Local | Remote | TP | 8-port | 16-port | 32-port |
|--------------------|-------|--------|----|--------|-----------------|-----------------|
| | 1 | 1 | 1 | - | S11X - MUIP1613 | S11X - MUIP3213 |
| | 1 | 1 | 2 | - | S11X - MUIP1624 | S11X - MUIP3224 |
| | 1 | 1 | 0 | - | S11X - MU1602 | S11X - MU3202 |
| | 1 | 2 | 0 | - | S11X - MU1603 | S11X - MU3203 |
| | 1 | 3 | 0 | - | S11X - MU1604 | S11X - MU3204 |

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-UKVM-KIT.pdf

| Combo Cat6 KVM | Local | Remote | TP | 8-port | 16-port | 32-port |
|-------------------|-------|--------|----|---------------|----------------|----------------|
| | 1 | 0 | 1 | S11X - UIP802 | S11X - UIP1602 | S11X - UIP3202 |
| | 1 | 1 | 0 | S11X - U802 | S11X - U1602 | S11X - U3202 |
| | 1 | 0 | 0 | S11X - U801 | S11X - U1601 | S11X - U3201 |

Cat6 KVM Dongle : DG-100S (VGA-USB) / DG-100 (VGA-PS/2) / DG-100SD (DVI-USB)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf

| Matrix DB-15 KVM | Local | Remote | TP | 8-port | 16-port | 32-port |
|---------------------|-------|--------|----|---------------|----------------|---------|
| | 1 | 1 | 1 | S11X - MIP813 | S11X - MIP1613 | - |
| | 1 | 1 | 2 | S11X - MIP824 | S11X - MIP1624 | - |
| | 1 | 1 | 0 | S11X - M802 | S11X - M1602 | - |
| | 1 | 2 | 0 | S11X - M803 | S11X - M1603 | - |
| | 1 | 3 | 0 | S11X - M804 | S11X - M1604 | - |

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf

| Combo DB-15 KVM | Local | Remote | TP | 8-port | 16-port | 32-port |
|--------------------|-------|--------|----|--------------|---------------|---------|
| | 1 | 0 | 1 | S11X - IP802 | S11X - IP1602 | - |
| | 1 | 1 | 0 | S11X - 802 | S11X - 1602 | - |
| | 1 | 0 | 0 | S11X - S801 | S11X - S1601 | - |

Combo DB-15 KVM Cable : CE-6 / 10 / 15 (6, 10 or 15 ft)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM-KIT.pdf

| DVI-D KVM | Local | Remote | TP | 12-port | - | - |
|--------------|-------|--------|----|--------------|---|---|
| | 1 | 0 | 0 | S11X - 1201D | - | - |

DVI-D KVM Cable : CI-6 / 15 (6 or 15 ft)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-USBKVM-KIT.pdf

| USB Hub DB-15 KVM | Local | Remote | TP | 8-port | 16-port | 32-port |
|----------------------|-------|--------|----|---------------|----------------|---------|
| | 1 | 0 | 1 | S11X - IP802H | S11X - IP1602H | - |
| | 1 | 1 | 0 | S11X - 802H | S11X - 1602H | - |
| | 1 | 0 | 0 | S11X - 801H | S11X - 1601H | - |

USB KVM Cable : CB-6 / 10 / 15 (6, 10 or 15 ft)