



### W119 Single Console



### Drawer Features & Display Benefits

- ▶ 1U 19" widescreen LCD console drawer
- ▶ 104-key keyboard with either touchpad or trackball
- ▶ New enhanced aesthetics with molded front handle
- ▶ Short depth design of 460mm ( 18.1" ) only
- ▶ Front USB port for device access ( USB Hub KVM only )

### Options

- 3G / HD / SD-SDI Broadcast-grade input ( w/ speaker )
- S-Video + Composite ( BNC )
- HDMI ( w/ speaker )
- 2-post rack mounting brackets ( **ORB-2.1** )
- DC power : 12V / 24V / 48V / 125V / 250V

### Specifications

#### • LCD Panel

Manufacturer :	
Size (diagonal) :	19" widescreen TFT
Max resolution :	1440 x 900
Brightness (cd/m2) :	300
Backlight :	CCFL
Colors :	16.7M
Contrast ratio (typ) :	1000 : 1
Viewing angle (H/V) :	160° x 160°
Active area (mm) :	408 x 255
MTBF (hrs) :	50,000
Video input :	VGA or DVI-D

- **Speaker :** Built-in Dual Stereo Speakers ( HDMI only ) 2W x 2

- **Casing Color :** Black ( RAL 9005 )

- **Power Input :** Auto-sensing 100 to 240VAC, 50 / 60Hz

#### • Power Consumption ( single console )

Screen on :	Max. 25W
Power saving mode :	Max. 4W
Power button on :	Max. 1W

#### • Environmental

Operating temperature :	0 to 55°C degree
Storage temperature :	-20 to 60°C degree
Operating humidity :	20~90%, non-condensing
Storage humidity :	5 ~90%, non-condensing
Operating altitude :	16,000 ft
Non-operating altitude :	40,000 ft
Shock :	10G acceleration ( 11ms duration )
Vibration :	5~500Hz 1G RMS random vibration

#### • Regulatory

Safety :	cUL, FCC & CE certified
Environmental :	RoHS2 & REACH compliant

#### • Weight ( single console )

Net :	11.5 kgs / 25.3 lbs
Gross :	16 kgs / 35.2 lbs

#### • Dimensions ( single console )

Product :	441.6 x 460 x 44 mm / 17.4 x 18.1 x 1.73 inch
Packing :	590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch

### Console Cable

#### CX-6



- 6 feet DVI-D console cable ( bundle )
- DVI-D + USB, server end
- DVI-D + DB15 ( USB KB & MS ), console port

#### CB-6


- 6 feet VGA console cable ( alternative )
- VGA + USB, server end
- DB15 ( VGA, USB KB & MS ), console port

### Keyboard

**Ge** G keyboard integrated with touchpad

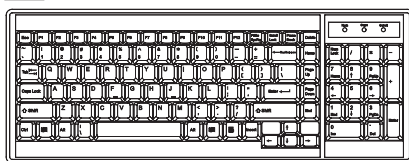

**Gb** G keyboard integrated with trackball

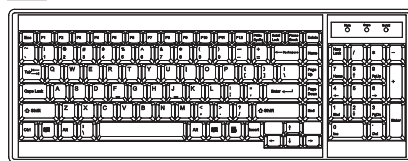

### Supporting layouts

<b>America</b>					
	United States				
<b>EMEA</b>					
	United Kingdom	Germany	France	Spain	Norway
	Italy	Russia	Switzerland	Netherlands	Portugal
<b>Asia</b>					
	China	Japan	Korea	Arabia	Turkey

# 1U 19" Widescreen LCD KVM Drawer



## • Dimensions ( with KVM )

Product : 441.6 x 580 x 44 mm / 17.4 x 22.8 x 1.73 inch

Packing : 590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch

## • Weight

Net : 12.5 kgs / 28 lbs

Gross : 18.1 kgs / 39.8 lbs

## • Power Consumption with KVM integration :

Screen on : Max. 55W

Power saving mode : Max. 34W

## • Casing Color : Black ( RAL 9005 )

\* For details, please refer to our KVM rear kit user manuals.

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MUKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MUKVM-KIT.pdf)

Matrix Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	-	W119 - MUIP1613	W119 - MUIP3213
	1	1	2	-	W119 - MUIP1624	W119 - MUIP3224
	1	1	0	-	W119 - MU1602	W119 - MU3202
	1	2	0	-	W119 - MU1603	W119 - MU3203
	1	3	0	-	W119 - MU1604	W119 - MU3204

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-UKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-UKVM-KIT.pdf)

Combo Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	W119 - UIP802	W119 - UIP1602	W119 - UIP3202
	1	1	0	W119 - U802	W119 - U1602	W119 - U3202
	1	0	0	W119 - U801	W119 - U1601	W119 - U3201

Cat6 KVM Dongle : DG-100S ( VGA-USB ) / DG-100 ( VGA-PS/2 ) / DG-100SD ( DVI-USB )

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf)

Matrix DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	W119 - MIP813	W119 - MIP1613	-
	1	1	2	W119 - MIP824	W119 - MIP1624	-
	1	1	0	W119 - M802	W119 - M1602	-
	1	2	0	W119 - M803	W119 - M1603	-
	1	3	0	W119 - M804	W119 - M1604	-

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf)

Combo DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	W119 - IP802	W119 - IP1602	-
	1	1	0	W119 - 802	W119 - 1602	-
	1	0	0	W119 - S801	W119 - S1601	-

Combo DB-15 KVM Cable : CE-6 / 10 / 15 ( 6, 10 or 15 ft )

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM-KIT.pdf)

DVI-D KVM	Local	Remote	IP	12-port	-	-
	1	0	0	W119 - 1201D	-	-

DVI-D KVM Cable : CI-6 / 15 ( 6 or 15 ft )

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-USBKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-USBKVM-KIT.pdf)

USB Hub DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	W119 - IP802H	W119 - IP1602H	-
	1	1	0	W119 - 802H	W119 - 1602H	-
	1	0	0	W119 - 801H	W119 - 1601H	-

USB KVM Cable : CB-6 / 10 / 15 ( 6, 10 or 15 ft )